


## 4 MP WDR Fixed 4mm IR Vandal Dome

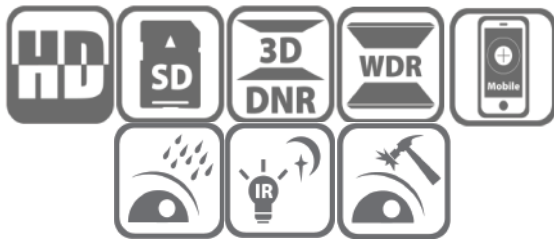



### Key features

- 4MP , 2688\*1520P
- Vandal Resistant
- IP66 Weather-Proof Protection
- 2.8mm Fixed Lens
- Up to 100ft IR Range
- 120dB Wide Dynamic Range
- 3D Digital Noise Reduction
- Full HD 1080P + 1520P Video
- Dual Video Streams
- 3-Axis Adjustment
- DC12V & POE

### Specifications

MIPD4	
<b>Camera</b>	
Image sensor	1/3" Progressive Scan CMOS
Min. illumination	0.01Lux @ (F1.2, AGC ON) , 0 Lux with IR
Shutter time	1/3s ~ 1/10,000s
Lens	2.8mm @ F2.0
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
Wide dynamic range	WDR 120dB
BLC	Support, zone configurable
<b>Compression standard</b>	
Video compression	H.264 / MJPEG / H.264+
H.264 compression profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
<b>Image</b>	
Max. image resolution	4MP , 2688*1520
Frame rate	50Hz: 20fps (2688×1520), 25fps(1920×1080), 25fps(1280×720) 60Hz: 20fps (2688×1520), 30fps (1920×1080), 30fps(1280×720)
Image settings	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
<b>Network</b>	
Network storage	NAS (Support NFS,SMB/CIFS), ANR
Alarm trigger	Motion detection, tampering alarm, network disconnect , IP address conflict, storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Standard	ONVIF (PROFILES, PROFILE G), PSIA, CGI, ISAPI
General	One-Key Reset, Flash-Prevention, Dual Stream, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filtering, Anonymous Access
<b>Interface</b>	
Communication interface	1 RJ45 10M / 100M ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
<b>General</b>	
Operating conditions	-22 °F ~ 140 °F(-30 °C ~ 60 °C ), humidity 95% or less (non-condensing)
Power supply	DC12V ± 10%, PoE (802.3af)
Power consumption	Max. 5W
Impact protection	IK08(-W model)/IK10(non -W model)
Ingress protection	IP66
IR range	Approx. 100ft
Dimensions	Φ4.4" × 3.2" (Φ111 × 82)
Weight	1.1lbs (500g)

### Dimensions

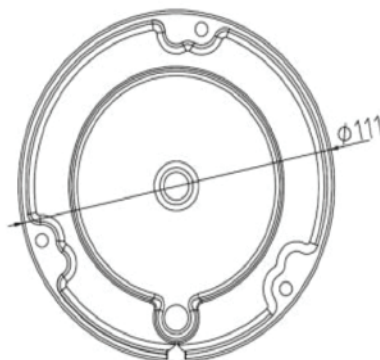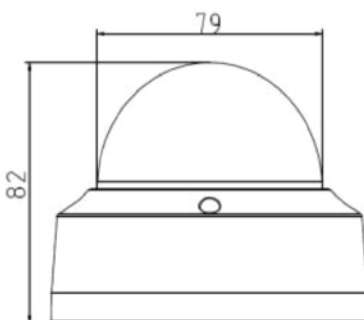

### Accessories



WMOUNT3  
Wall Mount